

This map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of His Majesty's Stationery Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. Stockport Metropolitan Borough Council AC0000804794 2026

Notes – General:

- 1) All dimensions are stated in metres unless stated otherwise
- 2) Engineer to mark up on site post locations
- 3) Risk of underground services - (Locations indicative only) - Contractor to verify on site before excavation

Notes - 1200 Series - Traffic Signs:

- 1) All sign post locations and sign face orientations are to be agreed on site by an engineer.
- 2) Sign installation details as per SMBC Standard Detail STP/H/27.
- 3) Proposed posts to be galvanised 76.1mm diameter, unless otherwise stated.
- 4) Proposed Gateway signs to be 3.7m height unless otherwise stated.
- 5) Signs to be mounted at 2.3m height
- 6) This drawing is to be read in conjunction with Drawing No. 1191/EPE/004 - Sign Face Details

Key - General:

- Boundary
- - - Existing Road Markings
- Remove post and/or sign to tip/store

Key - Series 1200 - Traffic Signs:


- TS-01** Proposed back to back 300mm diameter 670-20 signs on existing lighting column. 10 Locations = 20 no.
- TS-03** Proposed back to back Diag. 674 & 675 signs. 2 Locations = 4 no. (Type A), 2 Locations = 4 no. (Type B)
- New 76.1mm diameter galvanised post. 4 no.

Key - Series 1200 - Road Markings:

- Proposed white roundel to Diagram 1065 (20), 1600mm in length. 10 no.

Note: Totals are for each sheet

Rev.	Drawn	Checked	Date	Revision Details
AMENDMENTS				

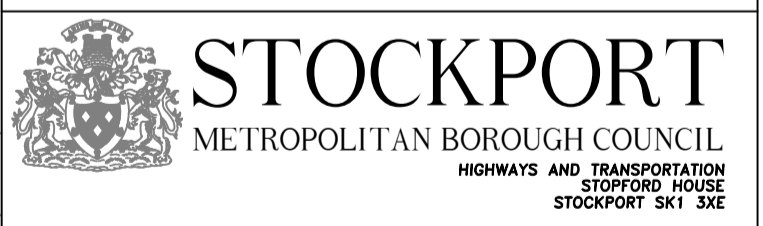

MARK GLYNN
DIRECTOR OF PLACE MANAGEMENT
Job Title

**Eden Park Est, Cheadle Hulme
20mph Speed Limit Zone**

**Proposals
ZONE 1**

Drawn	Engineer	Checked	Approved
GK	GK	CP	SL
Date	Date	Date	Date
14.06.26	14.06.26	30.04.26	30.04.26
Size	Scale		
A1	1:1000		
Drawing No.	1196 / 02 / EPE / 001		Revision

