

This map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of His Majesty's Stationery Office
© Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. Stockport Metropolitan Borough Council
AC0000804794 2026

Notes – General:

- 1) All dimensions are stated in metres unless stated otherwise
- 2) Risk of underground services – (locations indicative only). Contractor to verify on site prior to excavation
- 3) Engineer to mark up on site post locations

Notes - 1200 Series - Traffic Signs:

- 1) **All sign post locations and sign face orientations are to be agreed on site by an engineer.**
- 2) Sign installation details as per SMBC Standard Detail STP/H/27.
- 3) Proposed posts to be galvanised 76.1mm diameter, unless otherwise stated.
- 4) Proposed Gateway sign posts to be 3.7m height unless otherwise stated.
- 5) Signs to be mounted at 2.3m height
- 6) This drawing is to be read in conjunction with Drawing No.s 1196/03/NRE/003 & 1196/03/NRE/005

Key - General:

Existing Road Markings

Key - Series 1200 - Traffic Signs:

TS-03 Proposed back to back
Diag.674 & 675 signs

  Type A 2 no.
  Type B 2 no.


- New 76.1mm diameter galvanised CRANKED posts x 3.7m height

2 no.

Note: Totals are for each sheet.

Rev.	Drawn	Checked	Date	Revision Details

AMENDMENTS

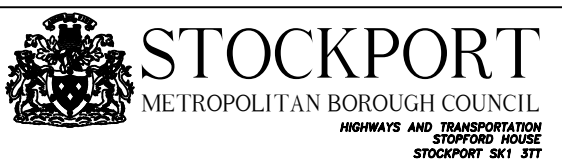

MARK GLYNN
DIRECTOR OF PLACE MANAGEMENT

Job Title

**NANSEN / FIRS ROAD ESTATE
HEALD GREEN**

Drawing Title

Proposed Gateway Sign Location - Layout 8

Drawn GK	Engineer GK	Checked CP	Approved SL
Date 09.04.26	Date 09.04.26	Date 03.06.26	Date 04.06.26
Size A2	Scale 1:250		
Drawing No. 1196 / 03 / NRE / 003.8			Revision